

High Velocity Fan Product Guide


MOUNTING OPTIONS:

- Standard/YM Yoke Mount (Bully -- 30")
- HV Ceiling Suspended (14" -- 30")
- TC Truck Cooler (14" -- 22")
- PS Pedestal Stroller (14" -- 30")
- PB Pedestal (Bully -- 30")
- CW Column Wall Mount (14" -- 30")

0.7 amps 115V*, 2 spd 800 CFM 1354 FPM dba bckgrd	2.6 amps 115V*, 1/4 HP 2600 CFM 2000 FPM 68 dba	5.1 amps 115V*, 1/2 HP 3800 CFM 2500 FPM 72 dba	5.1 amps 115V*, 1/2 HP 5800 CFM 2500 FPM 76.5 dba	1.8 amps 460V*, 1 HP 7650 CFM 2650 FPM 85.5 dba	1.8 amps 460V*, 1 HP 12,000 CFM 2400 FPM 90 dba
---	---	---	---	---	---

Suggested Fan Placement

NSN# 4140-01511-4643

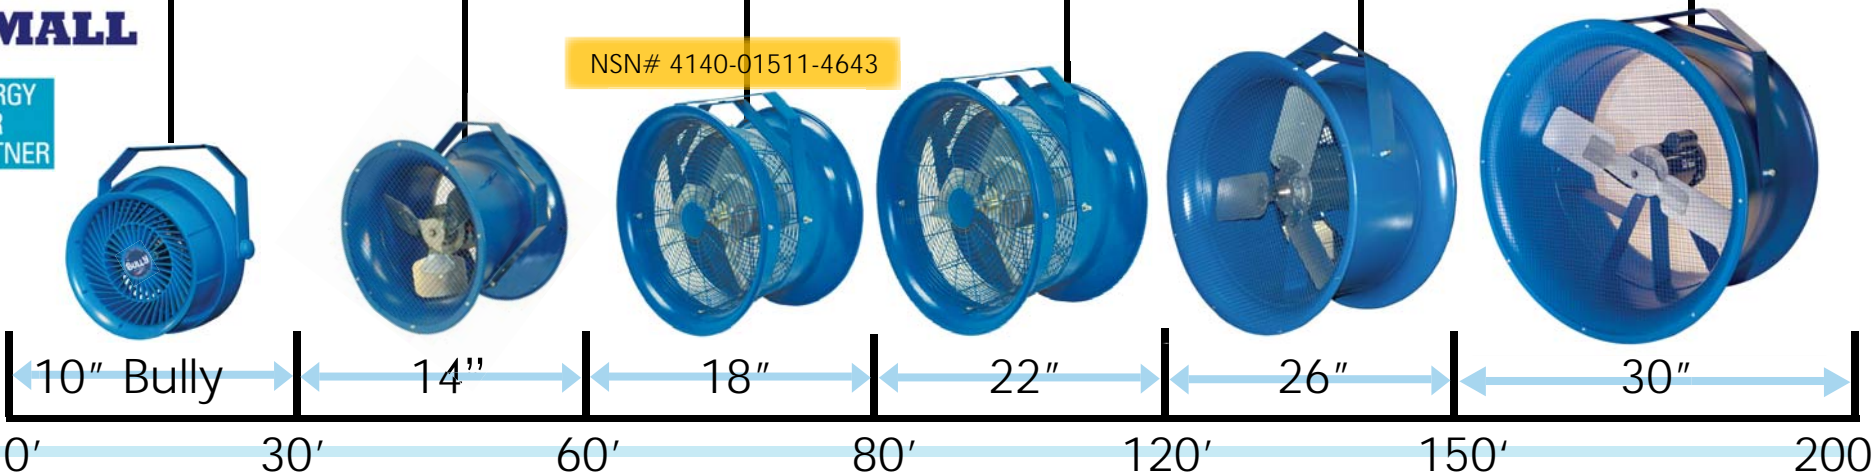

DoD EMALL



*Other Voltages Available

"AMP FOR AMP..THE BEST"

800.768.3985 / Fax: 803.691.4751 / www.pattersonfan.com

1120 Northpoint Blvd.
Blythewood, SC 29016

