
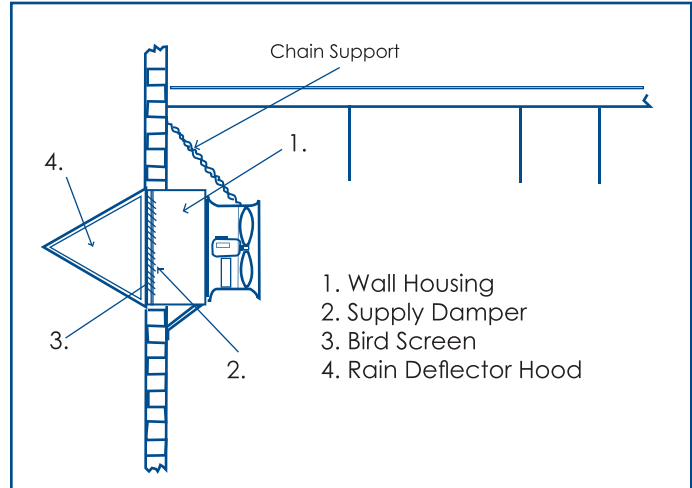


# HVSU 22"

## High Velocity Supply Wall Unit

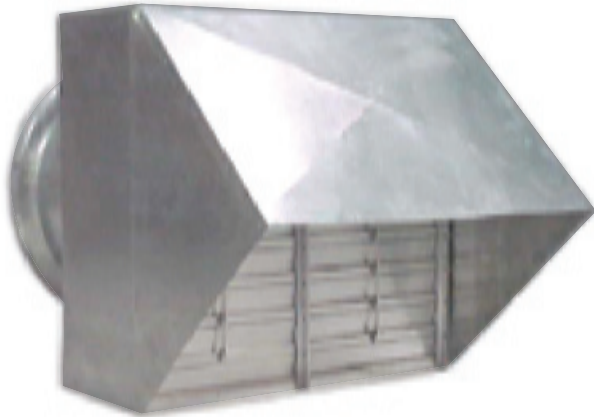

### BOX DIMENSIONS

WIDTH	DEPTH	HEIGHT
35.5"	12"	35.5"

SIZE	CFM	HP	FAN DIMENSIONS			DISTANCE AIR THROW	SHIPPING WEIGHT
			W	D	I.D.		
22"	5570	1	29"	16"	22 1/2"	100' / 30m	170 lbs/77.1 kg

**Propeller:** 20.75" Diameter, 3 Blade GalvAlum (19 Degree)

**Fan Inlet/Outlet:** 16 Gauge Spun Steel

**Hand Guards:** 2" Wire Spaced Concentric Rings

**RPM:** 1725

**Decible:** 76.5 dba

**Enclosure:** TEFC Standard

**Frame:** 56

**Ambient Temperature:** 40C

**Duty Cycle:** Continuous


**Coverage:** 3600 Sq.Ft. Max

**Warranty:** 2 Years

Voltage	Motor Amps	Running Amps
208-230/460V	2.3-2.4/1.2	2.0-2.1/1.1
277V	3.6	3.2

\* Standard

22" High Velocity Fan Air Flow Pattern

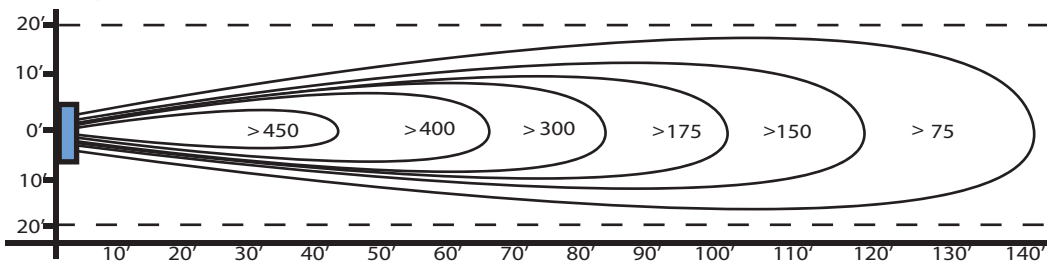

Above velocities shown in feet per minute.



05/21/09

Note: Due to continual product improvement, items are subject to change without notice.

Patterson Fan Company, Inc  
Blythewood, SC 29016  
www.pattersonfan.com  
800.768.3985

