


HVSU 30



High Velocity Supply Wall Unit

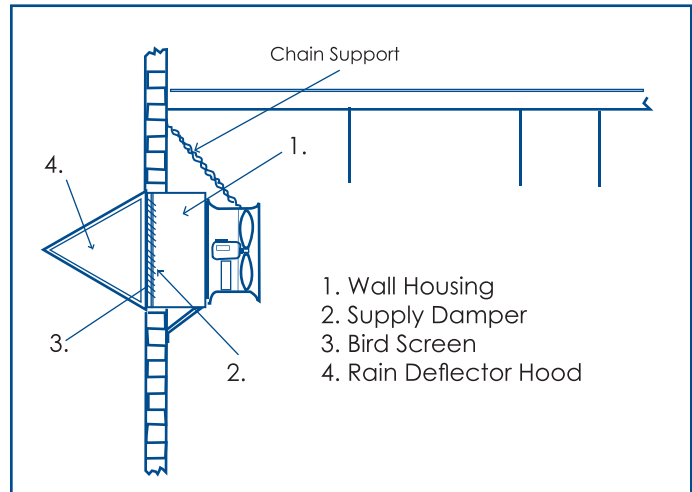

BOX DIMENSIONS

WIDTH	DEPTH	HEIGHT
43.5"	18"	43.5"

SIZE	CFM	HP	FAN DIMENSIONS			DISTANCE AIR THROW	SHIPPING WEIGHT
			W	D	I.D.		
30"	12,000	1.5	37"	22"	30 7/8"	200' / 60m	225 lbs/102 kg

Propeller: 30" Diameter, 2 Blade GalvAlum (15 Degree)

Fan Inlet/Outlet: 14 Gauge Spun Steel

Hand Guards: 2" Wire Spaced Concentric Rings

RPM: 1800

Decibel: 90 DBA

Enclosure: TEFC Standard

Frame: 56

Ambient Temperature: 40C

Duty Cycle: Continuous


Coverage: 12,000 Sq.Ft. Max

Warranty: 2 Years

Voltage	Motor Amps	Running Amps
208-230/460V	4.7-4.4/2.2	3.2-3.3/1.66

* Standard

30" High Velocity Fan Air Flow Pattern

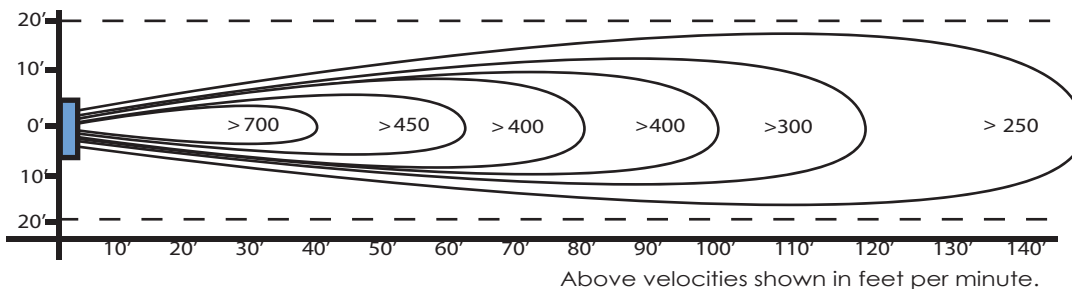

Above velocities shown in feet per minute.



05/21/09

Note: Due to continual product improvement, items are subject to change without notice.

Patterson Fan Company, Inc
 Blythewood, SC 29016
www.pattersonfan.com
 800.768.3985

