

# 14"

# HIGH VELOCITY FAN

ELECTRONICALLY COMMUTATED (EC) MOTOR



YM Yoke Mount Standard



Onboard Adjustment & Speed Indicator



Remote Controller



RM Rack Mount



TC Truck Cooler



CW Column-Wall



PS Portable Stroller



PB Pedestal Base

|                         |        |        |        |        |        |
|-------------------------|--------|--------|--------|--------|--------|
| <b>SHIPPING WEIGHT:</b> | 25 lbs | 36 lbs | 33 lbs | 56 lbs | 26 lbs |
|-------------------------|--------|--------|--------|--------|--------|

| SIZE | CFM  | HP  | FAN DIMENSIONS |     |         | AIR THROW DISTANCE | SHIPPING WEIGHT |
|------|------|-----|----------------|-----|---------|--------------------|-----------------|
|      |      |     | W              | D   | ID      |                    |                 |
| 14"  | 2600 | 1/2 | 20"            | 16" | 14.625" | 60'                | 20 lbs          |

## FEATURES

**Propeller:** 14" Diameter, 3 Blade GalvAlum, 37°  
**Fan Inlet/Outlet:** High Impact Polypropylene  
**Finger Guards:** OSHA Compliant Wire Guard  
**RPM:** 500 - 1800 (Variable Speed)  
**Decibels (Full Speed):** 63.1 @ 20' - 73.1 @ 3'  
**Coverage:** 1800 ft<sup>2</sup>

**Warranty:** 2 Years

## MOTOR

**Variable Speed, Electronically Commutated (EC) Motor**

**Enclosure:** TEAO Standard IP55  
**Frame:** 56  
**Ambient Temperature:** 104°F

**Duty Cycle:** Continuous


**One Motor Covers All Single Phase Options: 115V - 277V**

**Electronically Protected**

**Easy-to-Install External Controls & Readout**

**Modbus Connectivity**

| VOLTAGE  | FULL LOAD MOTOR AMPS |
|----------|----------------------|
| 115V     | 5.2                  |
| 208-230V | 3.2                  |
| 277V     | 2.5                  |

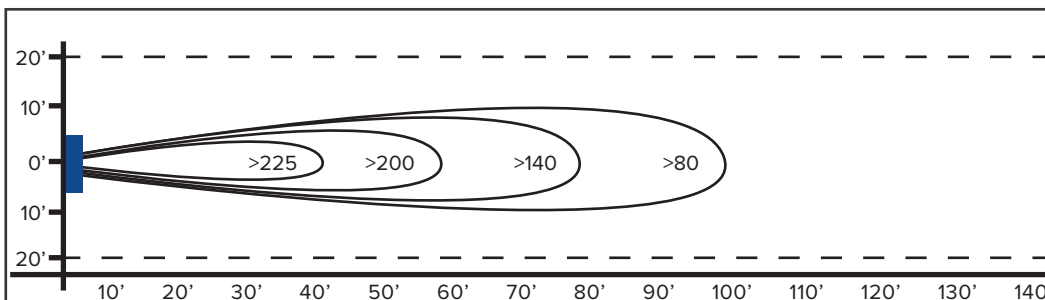

Above velocities shown in feet/minute.

**AIR FLOW PATTERN (FULL SPEED)**