

# 22"

# HIGH VELOCITY FAN galvanized



## YM -Yoke Mount (standard)

mounting options:



PS - Pedestal Stroller



CW - Column Wall



PB - Pedestal Base

Shipping Weights:

105 lbs/ 48 kg

91 lbs/ 41 kg

77 lbs/ 35 kg

SIZE	CFM	HP	FAN DIMENSIONS			DISTANCE AIR THROW	SHIPPING WEIGHT
			W	D	I.D.		
22"	5570	1/2	29"	16"	22.5"	100' / 30 m	69 lbs/ 31 kg

**Propeller:** 20.75" Diameter, 3 Blade GalvAlum (19 Degree)

**Fan Inlet/Outlet:** Galvanized 16 Gauge Spun Steel

**Finger Guards:** Stainless Steel Spiral

**Hand Guards (optional):** Galvanized Spiral Wound

**RPM:** 1725

**Decibels:** 73.6 @ 20'

**Enclosure:** TEAO Standard/ Washdown Available

**Frame:** 56

**Ambient Temperature:** 40C

**Duty Cycle:** Continuous

**Power Cord (115V Only):** 12' Length


**Coverage:** 3600 Sq.Ft. Max

**Warranty:** 2 Years

Voltage	Motor Amps	Running Amps
115V/ 208-230V*	6.0/ 3.0-2.9	5.9/ 2.9-2.8
208-230/ 460V	2.4-2.3/ 1.2	2.3-2.2/ 1.1
277V	1.85	1.75

\*standard

22" High Velocity Fan Air Flow Pattern

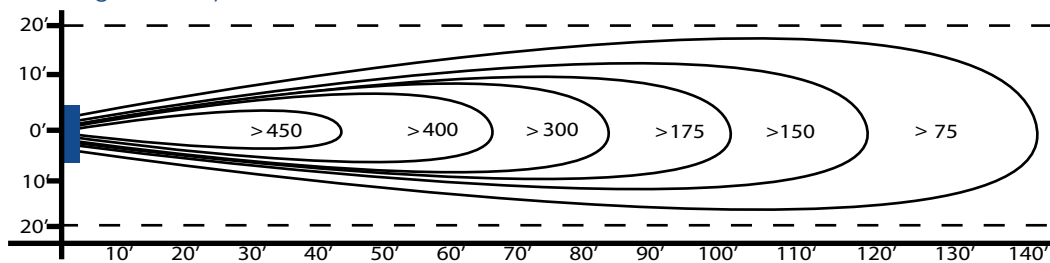

Above velocities shown in feet per minute.