

18"

HIGH VELOCITY FAN



STANDARD
YM - YOKE MOUNT

ADDITIONAL MOUNTING OPTIONS:



RM Rack Mount **TC** Truck Cooler **CW** Column-Wall **PS** Portable Stroller **PB** Pedestal Base

| SHIPPING WEIGHT: | 51 lbs | 60 lbs | 57 lbs | 80 lbs | 56 lbs |
|------------------|--------|--------|--------|--------|--------|
|------------------|--------|--------|--------|--------|--------|

| SIZE | CFM | HP | FAN DIMENSIONS | | | AIR THROW DISTANCE | SHIPPING WEIGHT |
|------|------|-----|----------------|-----|---------|--------------------|-----------------|
| | | | W | D | ID | | |
| 18" | 3800 | 1/2 | 24" | 16" | 19.125" | 80' | 44 lbs |

FEATURES

Propeller: 17" Diameter, 3 Blade GalvAlum, 33°
Fan Inlet/Outlet: High Impact Polypropylene
Finger Guards: OSHA Compliant, Spiral Wound Steel
Power Cord (115V Only): 12' Length (Switch Optional)
RPM: 1725
Decibels: 65.1 @ 20' - 76.3 @ 3'
Coverage: 2700 ft²


Warranty: 2 Years

MOTOR

| VOLTAGE | MOTOR AMPS | RUNNING AMPS |
|----------------|---------------|--------------|
| 115V/208-230V* | 6.0/3.0-2.9 | 5.9/2.9-2.8 |
| 208-230/460V | 2.11-1.91/.96 | 2.0-1.8/.9 |
| 277V | 1.85 | 1.75 |

Enclosure: TEAO Standard
Frame: 56
Ambient Temperature: 104°F
Duty Cycle: Continuous

*standard

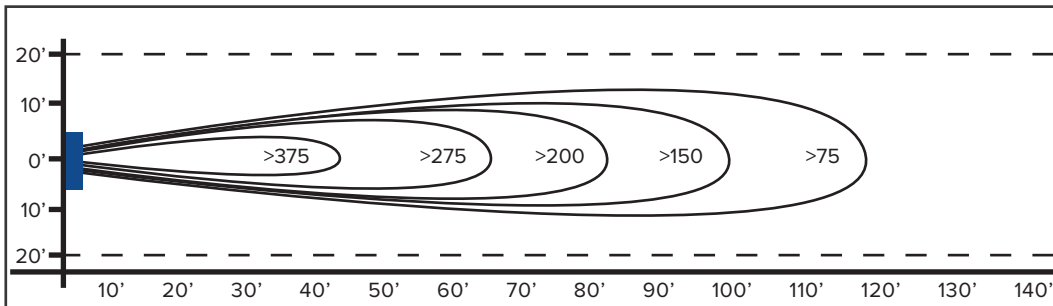

AIR FLOW PATTERN

Above velocities shown in feet/minute.